


THERMOZELL

Trockenrohdichte

DATENBLATT

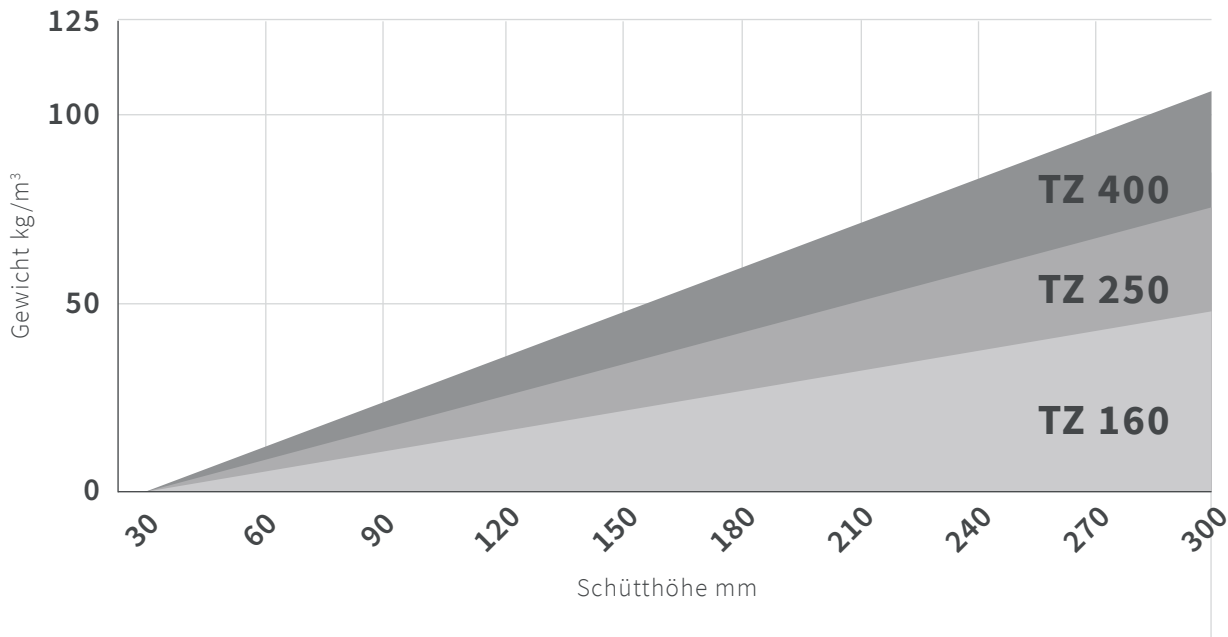

Thermozell Type	TZ 160	TZ 250	TZ 400
Trockenrohdichte kg/m3	ca. 210	ca. 300	ca. 390

Schütthöhe mm	Gewicht kg/m²	Gewicht kg/m²	Gewicht kg/m²
30	6,30	9,00	11,70
60	12,60	18,00	23,40
90	18,90	27,00	35,10
120	25,20	36,00	46,80
150	31,50	45,00	58,50
180	37,80	54,00	70,20
210	44,10	63,00	81,90
240	50,40	72,00	93,60
270	56,70	81,00	105,30
300	63,00	90,00	117,00